1. SUMMARY

The Primex CPO4 4-port customer premise wall outlet allows flexible in-suite termination of multiple services including fiber, tel, data, voice, and video keystone jacks. It's surface-mountability allows it to be used in both new and retrofit wiring applications.

This small foot print outlet is compatible with Cat5e, Cat6, RJ11, RJ12, standard fiber adapters, as well as Primex's Auto Shutter Fiber Jack.

2. DIMENSIONS

SIZE: 5"L x 3.5"W x 1.1"H

3. FEATURES & BENEFITS

- Accommodates up to 4 standard Cat5e, Cat6, telephone (RJ11/RJ12) and Auto Shutter Fiber Jack keystones.

- Small and compact form factor (5" x 3.5" x 1.1") provides low-profile aesthetic.

- 1-2 fiber capacity with two splice positions for versatility.

- Fits standard 4"x2" wall outlet receptacle.

- Made of flame-retardant ABS Polymer for durability.

- UL-listed

4. CONFIGURATIONS

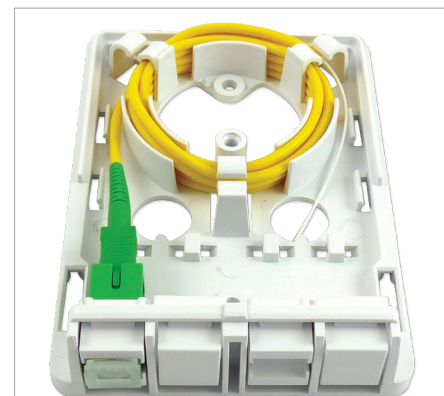| Part #	Description
125-0911	Customer Premise Outlet (4 port) empty
125-1101	Customer Premise Outlet w/1x simplex SC/APC adapter
125-1560	Customer Premise Outlet w/1x Fiber Auto-Shutter Keystone

Keystones (sold separately):

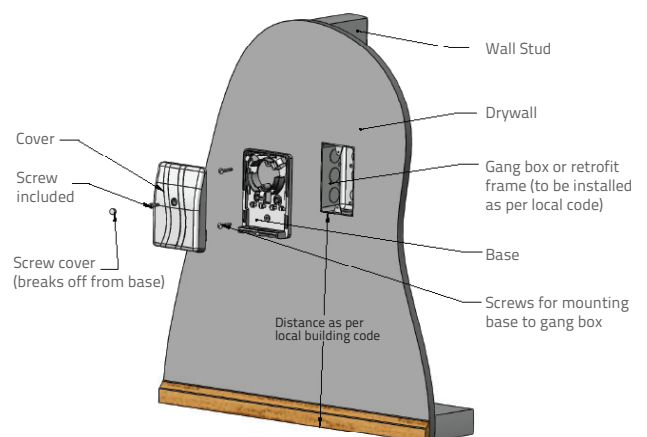| Part #	Description
125-0908	Fiber Keystone w/auto shutter
125-0947-WT	Cat6, 110 IDC, 90° HD
125-0946-WT	Cat6, 110 IDC, 180° HD
125-0960	Blank keystone
125-0961	F-connector 3GHz keystone
125-0959-WT	3-line voice, HD
125-0949-WT	Cat5e, 110 IDC, 90° HD
125-0948-WT	Cat5e, 110 IDC, 180° HD
125-1295	Fiber Keystone Adapter

125-1560
Includes 3x blank keystones, 1x Fiber Keystone with Auto-Shutter

125-1101
Includes 2x blank keystones, 2x fiber keystones, 1x SC/APC simplex adapter. Fiber not included.

Wall Stud
Drywall
Cover
Screw included
Gang box or retrofit frame (to be installed as per local code)
Base
Screw cover (breaks off from base)
Screws for mounting base to gang box
Distance as per local building code