

PRIMEX

Product Specifications

P138ENC-XFX

Copper/Coax Base OSP Enclosure

1. SUMMARY

The Primex Wave P138ENC-XFX is a compact Copper/Coax enclosure ideal for broadband SFU and MDU and small business applications.

This enclosure features a conduit adapter and the industry-standard hole mounting pattern for complete customization with accessories. It's scalable to the customer's needs for a wide range of big or small applications.

2. DIMENSIONS

Inside: H 8.9"/W 6"/D 3.2"
 Outside: H 10.3"/W 7.9"/D 3.8"

3. FEATURES & BENEFITS


- Blank internal cavity with back knockouts allows for customized configuration of accessories and components.
- Snap lock and hex screw provides secure service provider access 24/7.
- High quality PVC or polypropylene made in North America for long-lasting protection in demanding weather conditions.
- Robust one-inch port with grommets for protected entry and exit.
- Internal mounting bosses for quick and easy deployment.
- UL-listed and industry-standardized for easy implementation.

4. APPLICATIONS

- FTTH for single or multi family units
- FTTB for small businesses (MTU)

5. CONFIGURATIONS

Part #	Part Name	Description
125-0465	P138ENC-XFX	1 Port-1" Grommet/ Blank / 2 Back Panel Knockouts

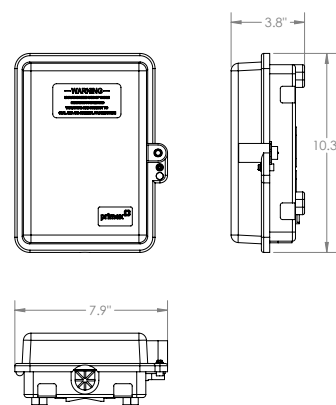

FOR MORE INFORMATION CONTACT:

1.604.881.7875 1.604.881.7835

www.primex.com



primex  Fit everything. Together.