

PRIMEX

Product Specifications

P1000MFSC-THG24SASD

24 Fiber Splice & Connect OSP Enclosure

1. SUMMARY

The Primex Wave P1000MFSC-THG24SASD is a mid-size 24 fiber splice and connect enclosure ideal for FTTH MDU applications.

The integrated Splice Tray and service divider allow for the efficient and protected connection and management of 24 fiber applications.

2. DIMENSIONS

Inside: H 10.2"/W 8.7"/D 2.4"
Outside: H 13.1"/W 11.5"/D 3"

3. FEATURES & BENEFITS


- Low-profile enclosure with 24 fiber splice, storage and connection within a Fiber Tray for FTTH applications.
- Secure integrated fiber management via SC/APC adapters and Fusion Splice Tray.
- Integrated ratchet cable spool allows for quick and easy slack storage release of outgoing cables without disconnection.
- Pre-connectorized with single mode G.652.D fiber to splice with incoming fiber.
- Snap lock and hex bolt provide secure service provider access 24/7.
- High quality UV-protected PVC made in North America for long-lasting fiber protection in demanding weather conditions.
- Four robust one-inch ports with grommets for protected fiber entry and exit.
- External wall and pole mounting brackets allow for quick and easy deployment.
- UL-listed and industry-standardized for easy implementation.

4. APPLICATIONS

- FTTH for multi dwelling units

5. CONFIGURATIONS

Part #	Part Name	Description
125-1701	P1000MFSC-THG24SASD	Hex, gasket, 24x SC/APC, Fiber Tray, 4x grommets, 3x CClips, ground lug, fiber cradle

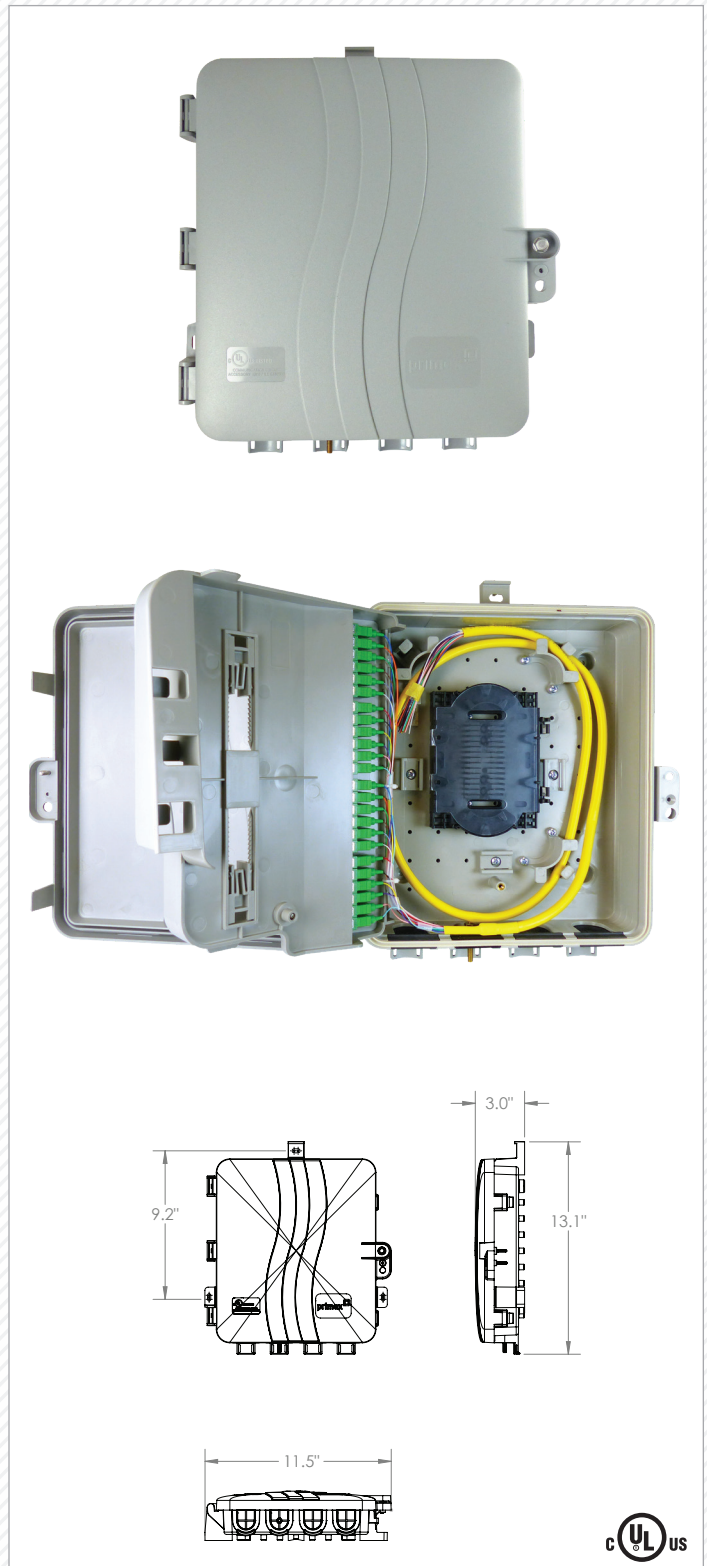

FOR MORE INFORMATION CONTACT:

📞 1.604.881.7875 📠 1.604.881.7835

www.primex.com     

primex  **Fit everything. Together.**