

PRIMEX

Product Specifications

P500FCC-XHG1SA

1 Fiber Cross-Connect OSP Enclosure

1. SUMMARY

The Primex Wave P500FCC-XHG1SA is a compact one fiber cross connect enclosure ideal for FTTH SFU or small business applications where slack storage is needed.

The simplex SC/APC adapter and cable (Hurricane) clips allows for the quick connection and management of single fiber applications.

2. DIMENSIONS

Inside: H 6.9"/W 5.4"/D 3.1"
Outside: H 10"/W 8"/D 3.9"

3. FEATURES & BENEFITS


- Small footprint, low profile design provides a simple splice and connect with room for slack storage.
- Integrated fiber management and SC/APC adapter for easy single fiber connection.
- Snap lock and hex bolt lock provides secure service provider access 24/7.
- High quality UV-protected PVC made in North America for long-lasting fiber protection in demanding weather conditions.
- Two robust one-inch ports with grommets for protected fiber entry and exit.
- External wall and pole mounting brackets allow for quick and easy deployment.
- UL-listed and industry-standardized for easy implementation.

4. APPLICATIONS

- FTTH for single family units
- FTTB for small businesses (MTU)

5. CONFIGURATIONS

Part #	Part Name	Description
125-1707	P500FCC-XHG1SA	Hex, gasket, 1x SC/APC, 2x grommets, 2x HClips, ground lug

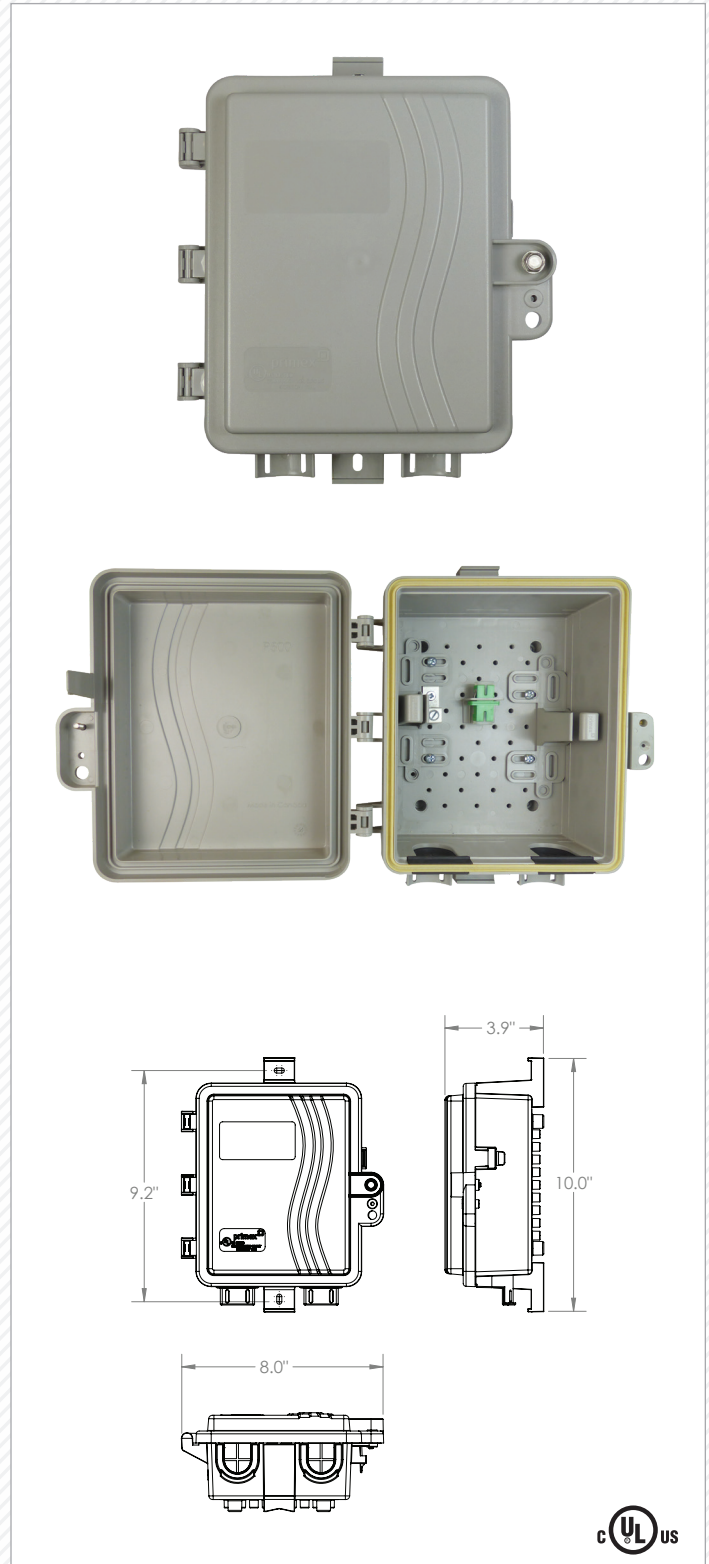

FOR MORE INFORMATION CONTACT:

📞 1.604.881.7875 📠 1.604.881.7835

www.primex.com



primex  Fit everything. Together.