

PRIMEX

Product Specifications

P250FCC-XHX2SA

1-2 Fiber Cross-Connect OSP Enclosure

1. SUMMARY

The Primex Wave P250FCC-XHX2SA is an economical dual fiber, cross-connect OSP enclosure ideal for FTTH SFU or duplex applications where space is limited.

The simplex SC/APC adapters and integrated cable (Hurricane) clips allow for the quick connection and management of dual fiber applications.

2. DIMENSIONS

Inside: H 4.5"/W 6.2"/D 2.4"
Outside: H 6.7"/W 7.9"/D 2.9"

3. FEATURES & BENEFITS



- Compact, low profile design provides a simple two fiber cross-connect for SFU or small business applications.
- Integrated fiber management for connecting and storing two fibers.
- Snap lock and hex bolt provide secure service provider access 24/7.
- High quality UV-protected PVC made in North America for long-lasting fiber protection in demanding weather conditions.
- Two robust 3/4" ports with grommets for protected fiber entry and exit.
- External wall and pole mounting brackets allow for quick and easy deployment.
- UL-listed and industry-standardized for easy implementation.

4. APPLICATIONS

- FTTH for single family units or duplexes

5. CONFIGURATIONS

Part #	Part Name	Description
125-1253	P250FCC-XHX2SA	Hex, 2x SC/APC, 2x grommets, 4x HClips, ground lug

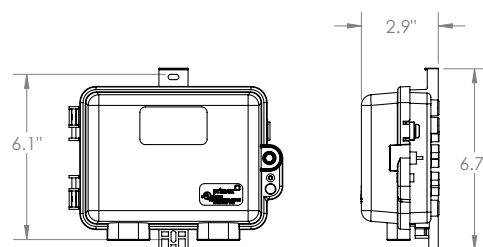

FOR MORE INFORMATION CONTACT:

1.604.881.7875 1.604.881.7835

www.primex.com



primex  Fit everything. Together.