

PRIMEX

Product Specifications

P1500SS w/Service Divider

P1500SSFSC-THG24SASD / TOG24SASD

1. SUMMARY

The Primex Wave P1500SSFSC with Service Divider is a large, 24 fiber, splice and connect enclosure that cleanly and easily separates the splice tray and cross-connect adapters for multi-tiered installations.

The design incorporates Primex fiber splice trays, fan out kit and a unique adjustable fiber management system for efficient and compact installation. Access is restricted to the splice compartment via a Torx™ screw and it includes snap and hex or override locks for secure access.

2. DIMENSIONS

Inside: H 14.0"/W 10.1"/D 3.3"



Outside: H 17.0"/W 13.0"/D 4.1"

3. FEATURES & BENEFITS

- Compact, low profile design provides simple fiber splice and connect point for 24 fiber MDU applications.
- Integrated ratchet cable spool allows for quick and easy slack storage release of outgoing cables without disconnection.
- Pre-connectorized with single mode G.652.D fiber to splice with incoming fiber.
- Equipped with Primex 12 (2) fiber trays and fan out kits for compact, efficient splicing.
- Low profile 90° cable clips and ties for efficient cable management.
- Quick release splice mount allows for rapid removal and installation of splice tray.
- High quality UV-protected PVC made in North America for long-lasting fiber protection in demanding weather conditions.
- External wall mounting tabs that eliminate the need to drill through the box, allowing for quick and easy deployment.

4. APPLICATIONS

- FTTH for multi dwelling units (MDU)

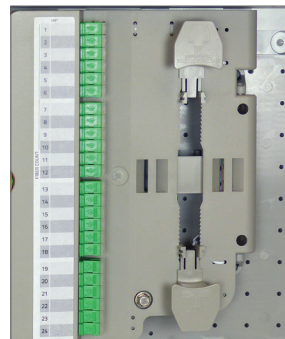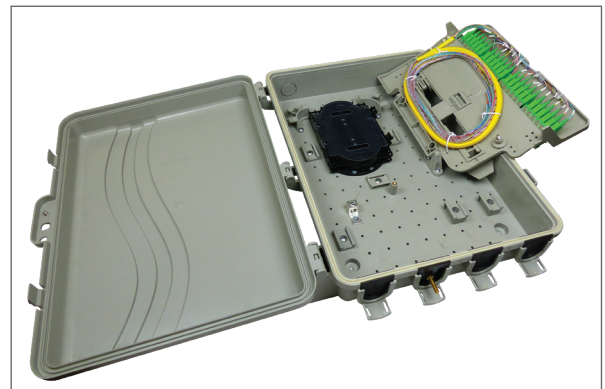


Ratcheting cable spool



Low profile 90 degree cable clips



125-1767 Hex Lock



125-1807 Override Lock



FOR MORE INFORMATION CONTACT:

1.604.881.7875 1.604.881.7835

www.primex.com    

primex  Fit everything. Together.

5. CONFIGURATIONS


MODELS		
PART NUMBER	PART NAME	DESCRIPTION
125-1767	P1500SSFSC-THG24SASD	P1500SS, w/ Service Divider, hex bolt, 2x 12 fiber splice tray, 24 SC/APC adapters, 24 fiber fan out kit
125-1807	P1500SSFSC-TOG24SASD	P1500SS, w/ Service Divider, override lock, 2x 12 fiber splice tray, 24 SC/APC adapters, 24 fiber fan out kit

6. TECHNICAL DRAWINGS

DIMENSIONS

All dimensions are external unless indicated otherwise.

Size may vary depending upon model.

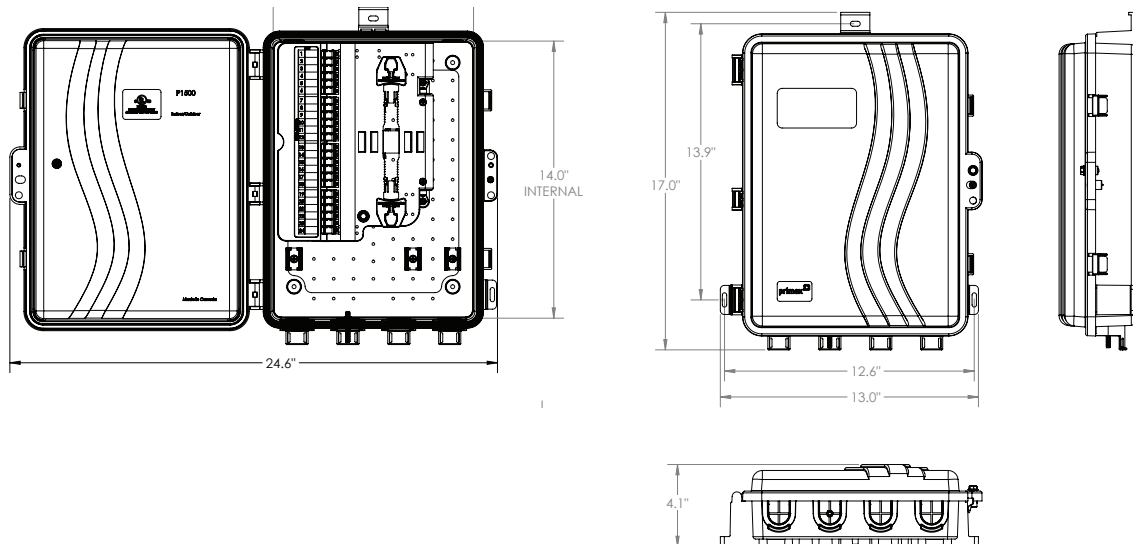

FOR MORE INFORMATION CONTACT:

1.604.881.7875 1.604.881.7835

www.primex.com

